


## 5 C-ONE PLANA

**Space Saving**

**No Strain With  
Hand Pallet Truck**

**No Forks Length Problems  
With Electrical Pallet Truck**

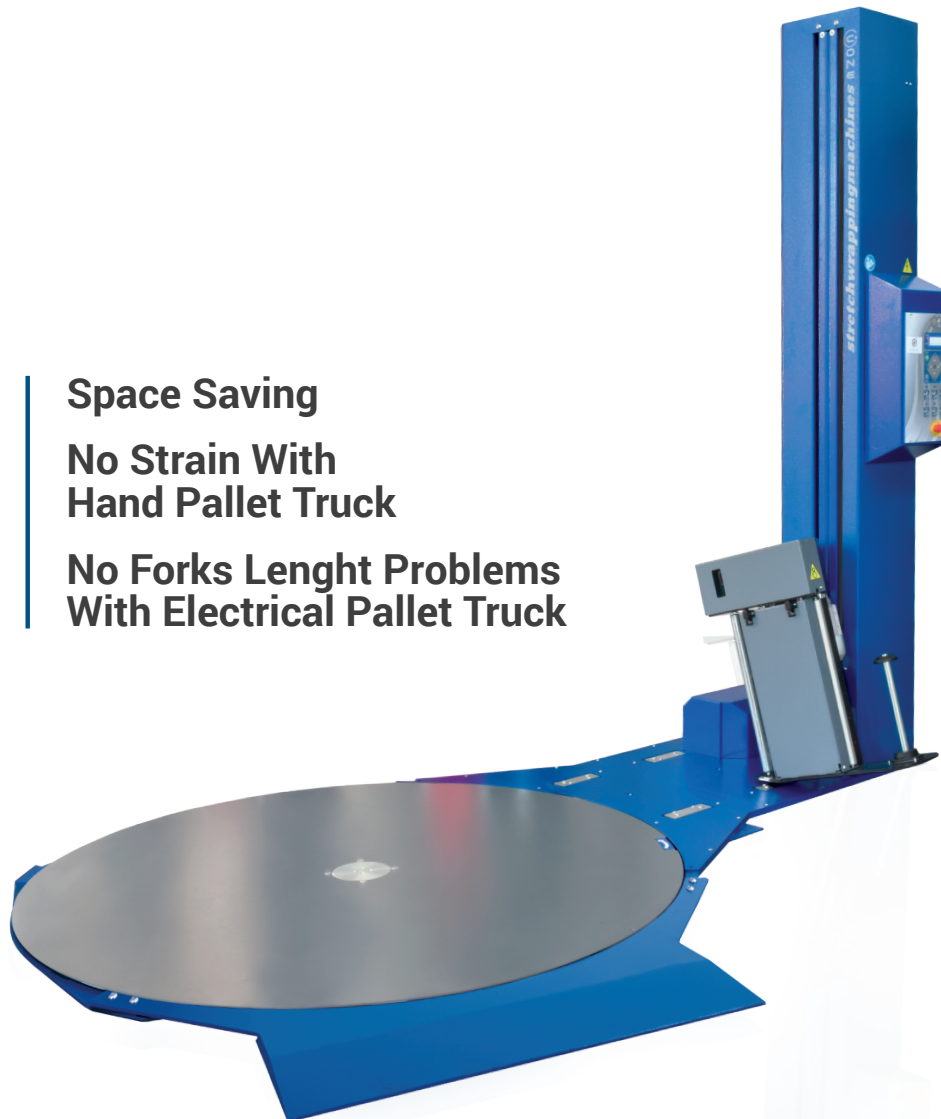

### Technical Data

Height	2424 mm
Width	1650 mm
Length	2830 mm
Turntable height	18 mm
Weight	500 kg
Power supply	230 VAC 1PH+N+PE
Power absorption	1 kW

### C-One Plana

**A very strong driving system, a 1.500 kg max payload, everything in just 18 mm.**

Ladies and gentlemen here is a record-breaker: at a height of only 18 mm, the C-One Plana is the lowest turntable in the world! Thanks to its reduced height, the ramp is only 20 cm long, therefore loading is easier and safer.


Trip or fall risks are minimised with no need for speed to help loading pallet.

The turntable is so low it will not be damaged by the forks on forklifts and also any length of fork can be used.

Offering 1.5m<sup>2</sup> space saving due to no requirement for ramp.



C-One Plana starts a new era in pallet wrapping!

**5 C-ONE PLANA** ..... *Semi-Automatic*

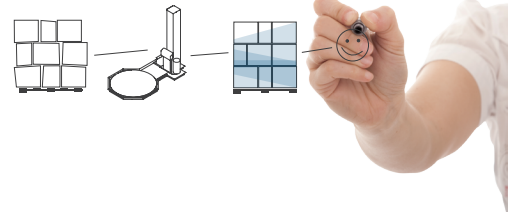

**Product Specifications**

- > Electronic printed circuit board for the management of the cycle
- > Frequency controller for carriage speed adjustment
- > Frequency controller for turntable speed adjustment
- > Loading plate ø 1650 mm
- > Maximum height of pallet: 2200 mm
- > Maximum size of the pallet: 1000x1200 mm
- > Electromagnetic brake for the stretching of the film
- > Photocell for pallet height detection
- > Safety stop at the base of the carriage
- > Stop at 0 position
- > Power board IP54
- > 3 password levels (including lock password)
- > Stop at 0 position
- > Power board IP54
- > 3 password levels (including lock password)
- > Adjustable parameters by the control panel without password: cycle selection, bottom laps, top laps, topsheet cycle parameters, rotation speed, carriage ascent speed, carriage descent speed, film tension, starting wrapping height
- > Quick selection of 6 main parameters or saved programs
- > USB port to upload software and download settings and reports
- > Statistics
- > 6 working cycles: ascent/descent; topsheet; only ascent; only descent; layers; stack
- > Storage of 32 end user programs
- > 3 working ways: semimanual, semiautomatic, fixed height
- > Strengthening operation
- > Acoustic warning at the cycle start and stop
- > Autodiagnostic
- > Wrapped pallet counter
- > Powder coating
- > Braked turntable at the end of the cycle
- > 2 years warranty

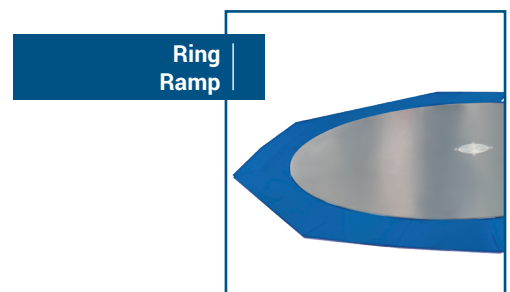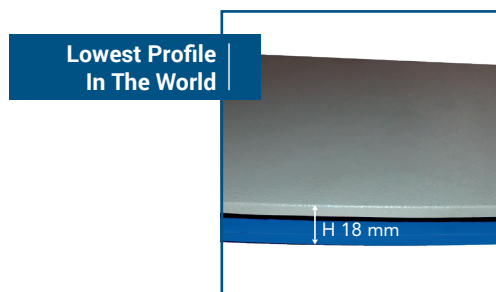

**Main Options**

- |  |  |
|--|--|
| Top-press                                  | Remote control                             |
| Tilting Carriage                           | Ramp                                       |
| Power pre-stretch                          | Ring Ramp                                  |
| Adjustable power pre-stretch               | Photocell for dark loads                   |
| Power pre-stretch with auto cut-off system | Clip to tie the film to the turntable      |
| Roping system                              | Mechanical system to brake roll containers |
| 3000 mm max wrapping height                | Safety fences                              |

